

# ABS | Upright Cabinets

FREEZER UPRIGHT ▶ CLASS A ▶ INOX

CNX 4



|  |                    |           |                          |                            |          |
|--|--------------------|-----------|--------------------------|----------------------------|----------|
|  | GAS<br><b>R290</b> | <br>60 mm | <b>A</b><br>ENERGY CLASS | <b>3</b><br>CLIMATIC CLASS | <br>38°C |
|  |                    |           |                          |                            |          |

## DETAILS

|   |                                    |                          |
|---|------------------------------------|--------------------------|
|   |                                    |                          |
| Opening door alarm/High temperature alarm | Blue backlit main switch           | Fixed evaporator shelves |
|   |                                    |                          |
| Pressure valve for easily opening door    | Removable bottom shelf as standard | Inner assistance fan     |


## GENERAL FEATURES

- 400 Lt. Freezer upright (CLASS A)
- S/S external cabinet, thermoformed internally
- Static cooling: fixed evaporator shelves (N.6 Layers) with fan assisted cooling
- Manual Defrost
- Foaming Agent Cyclopentane (60mm per side)
- Digital Thermostat
- Opening door alarm/High temperature alarm
- Removable Gasket
- Door: Self closing and reversible door fitted as standard
- Lock and main switch fitted as standard
- Removable bottom shelf as standard
- N.2 Adjustable feet + N.2 Rollers at the back
- Energy efficiency class: A

## TECHNICAL SPECIFICATIONS

|                                  |                      |
|----------------------------------|----------------------|
| Capacity                         | <b>400 L</b>         |
| Temperature                      | <b>-23°C - -18°C</b> |
| Consumption                      | <b>1.57 kWh/24h</b>  |
| Rated Power                      | <b>210 W</b>         |
| Noise level                      | <b>53 dB(A)</b>      |
| Net Weight                       | <b>77 Kg</b>         |
| Gross Weight                     | <b>87 Kg</b>         |
| External Dimensions (WxDxH mm)   | <b>600x643x1875</b>  |
| Internal Dimensions (WxDxH mm)   | <b>460x448x1611</b>  |
| Packaging dimensions (WxDxH mm)  | <b>660x705x2060</b>  |
| Loading quantities 20'/40'/40"HQ | <b>24/54/54</b>      |

## PRODUCT DIMENSIONS

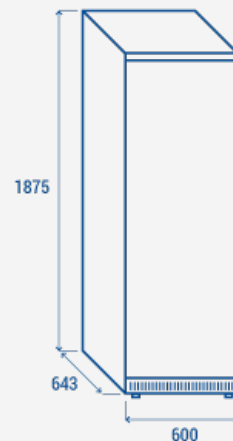

## CERTIFICATION

CE RoHS



**RIGHTWAY ASIA**  
We make the world a cooler place