

ABS | Upright Cabinets

REFRIGERATED UPRIGHT ▶ CLASS A ▶ INOX



CRX 2

GAS R600a		50 mm	A+++ ENERGY CLASS	3 CLIMATIC CLASS	 38°C

DETAILS

 Opening door alarm/High temperature alarm	 External cylindric handle in stainless steel (Steel color for X Version)	 Inner assistance fan
 Blue backlit main switch	 Shelf with small distance between the line and bottom shelf fits as standard	

GENERAL FEATURES

- 200 Lt. Refrigerated upright (CLASS A++)
- S/S external cabinet, thermoformed internally
- Roll-bond evaporator system with fan assisted cooling
- Automatic compressor cycle defrost
- Foaming Agent Cyclopentane (50mm per side)
- Digital Thermostat
- Opening door alarm/High temperature alarm
- Removable Gasket
- Reversible door with stainless steel external handle
- Lock and main switch fitted as standard
- Adjustable shelves: 2 Pcs + 1 Pcs Bottom
- N.2 Adjustable feet + N.2 Rollers at the back
- Energy efficiency class: A++


TECHNICAL SPECIFICATIONS

Capacity	200 L
Temperature	+0°C - +8°C
Consumption	0.37 kWh/24h
Rated Power	56 W
Noise level	40 dB(A)
Net Weight	43 Kg
Gross Weight	48 Kg
External Dimensions (WxDxH mm)	598x679x838
Internal Dimensions (WxDxH mm)	477x443x652
Packaging dimensions (WxDxH mm)	650x680x880
Loading quantities 20'/40'/40"HQ	48/108/162

CERTIFICATION

CE RoHS

PRODUCT DIMENSIONS

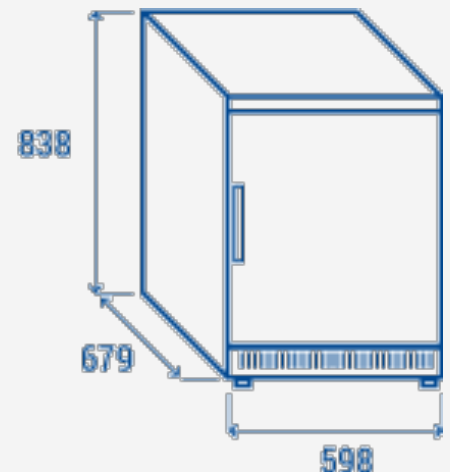

RIGHTWAY ASIA
We make the world a cooler place