

# ABS | Upright Cabinets

REFRIGERATED UPRIGHT ▶ CLASS A ▶ INOX



# CRX 4

GAS <b>R600a</b>		 70 mm	<b>A</b> ENERGY CLASS	<b>3</b> CLIMATIC CLASS	 38°C

## DETAILS

 Opening door alarm/High temperature alarm	 Inner assistance fan	 Air circulating fan assistance
 Blue backlit main switch	 Shelf with small distance between the line and bottom shelf fitted as standard	

## GENERAL FEATURES

- 400 Lt. Refrigerated upright (CLASS A)
- S/S external cabinet, thermoformed internally
- Roll-bond evaporator system with fan assisted cooling
- Automatic compressor cycle defrost
- Foaming Agent Cyclopentane (70mm per side)
- Digital Thermostat
- Opening door alarm/High temperature alarm
- Removable Gasket
- Door: Self closing and reversible door fitted as standard
- Lock and main switch fitted as standard
- Adjustable shelves: 4 Pcs + 1 Pcs Bottom
- N.2 Adjustable feet + N.2 Rollers at the back
- Energy efficiency class: A


## TECHNICAL SPECIFICATIONS

Capacity	<b>400 L</b>
Temperature	<b>+0°C - +8°C</b>
Consumption	<b>0.41 kWh/24h</b>
Rated Power	<b>105 W</b>
Noise level	<b>53 dB(A)</b>
Net Weight	<b>78 Kg</b>
Gross Weight	<b>88 Kg</b>
External Dimensions (WxDxH mm)	<b>600x666x1875</b>
Internal Dimensions (WxDxH mm)	<b>460x467x1643</b>
Packaging dimensions (WxDxH mm)	<b>660x705x2060</b>
Loading quantities 20'/40'/40"HQ	<b>24/54/54</b>

## CERTIFICATION

CE RoHS

## PRODUCT DIMENSIONS

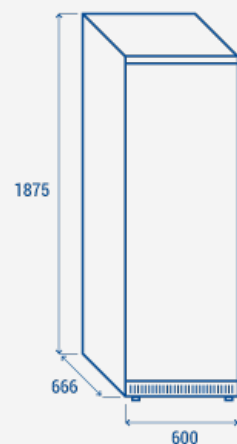

**RIGHTWAY ASIA**  
We make the world a cooler place