

ABS | Upright Cabinets

REFRIGERATED UPRIGHT ► GLASS DOOR ► INOX



GENERAL FEATURES

- 400 Lt. Refrigerated upright (GLASS DOOR)
- S/S external cabinet, thermoformed internally
- Roll-bond evaporator system with fan assisted cooling
- Automatic compressor cycle defrost
- Foaming Agent Cyclopentane (70mm per side)
- Digital Thermostat and internal LED light
- High temperature alarm
- Removable Gasket
- Door: Self closing and reversible door fitted as standard
- Lock and main switch fitted as standard
- Adjustable shelves: 4 Pcs + 1 Pcs Bottom
- N.2 Adjustable feet + N.2 Rollers at the back
- Stainless steel external handle
- Energy efficiency class: D

TECHNICAL SPECIFICATIONS

Capacity	400 L
Temperature	+2°C ~ +8°C
Consumption	1.932 kWh/24h
Rated Power	120 W
Noise level	53 dB(A)
Net Weight	96.5 Kg
Gross Weight	107 Kg
External Dimensions (WxDxH mm)	600x708x1875
Internal Dimensions (WxDxH mm)	460x467x1643
Packaging dimensions (WxDxH mm)	660x705x2060
Loading quantities 20'/40'/40'HQ	24/54/54

CERTIFICATION

CE RoHS


CRXG 4



DETAILS



PRODUCT DIMENSIONS

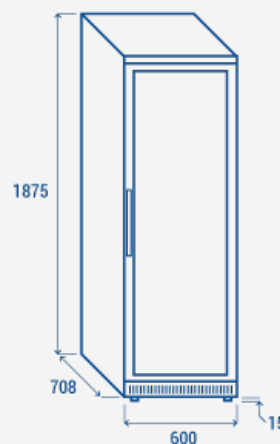

RIGHTWAY ASIA
We make the world a cooler place