

INOX | Upright Cabinets

REFRIGERATED CABINETS ► GN2/1-NO FROST ► CHILLER

QR 12



DETAILS



The items can be supplied either with adjustable feet or lockable castor



Evaporator with anti-corrosion treatment



Inner stainless steel waved guides



Anti-condensation "thermal-braker" on door frame



Lock fitted as standard



Digital control and white backlit main switch



Inner LED light



Cabinet suitable for GN2/1 pans

GENERAL FEATURES

GN2/1 Refrigerated upright cabinet	•
Stainless Steel exterior and interior	•
Plastic thermal-braker anti-condensation as chamber body frame	•
Ventilated Cooling	•
Evaporator with anti-corrosion treatment	•
Hot gas defrost system	•
Foaming Agent Cyclopentane (80mm)	•
Curved edge for easy cleaning	•
Digital Thermostat	•
White backlit main switch	•
LED light and lock fitted as standard	•
Removable Gasket	•
Door with self closing door	•
Foamed door handle	•
Adjustable shelves GN2/1: 6 + 2	•
N.4 S/S Adjustable feet - (Lockable castor as Optional)	•
Energy efficiency class: C	•


TECHNICAL SPECIFICATIONS

Capacity	1255 L
Temperature	-2° ~ +8°C
Consumption	2.57 kWh/24h
Rated Power	286 W
Noise level	50 dB(A)
Net Weight	165.00 Kg
Gross Weight	187.00 Kg
External Dimensions (WxDxH mm)	1400x823x2075
Internal Dimensions (WxDxH mm)	1234x685x1485
Packaging dimensions (WxDxH mm)	1440x840x2120
Loading quantities 20'/40'/40'HQ	10/22/22

CERTIFICATION

CE RoHS

PRODUCT DIMENSIONS

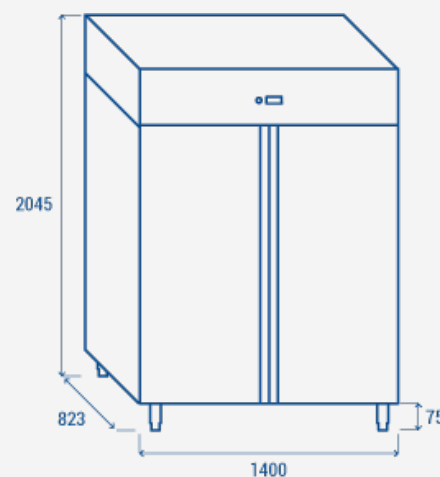

RIGHTWAY ASIA
We make the world a cooler place