

ABS | Upright Cabinets

REFRIGERATED UPRIGHT ► INOX



GENERAL FEATURES

400 Lt. Refrigerated upright	•
Gray coated plate external cabinet and door in stainless steel, thermoformed internally	•
Roll-bond evaporator system with fan assisted cooling	•
Automatic compressor cycle defrost	•
Foaming Agent Cyclopentane (60mm per side)	•
Digital Thermostat	•
Removable Gasket	•
Reversible door	•
Handle along door profile	•
Doors lock fitted as standard	•
Adjustable shelves: 4 Pcs + 1 BOTTOM Shelf	•
N.2 Adjustable feet + N.2 Rollers at the back	•
Energy efficiency class: D	•

TECHNICAL SPECIFICATIONS

Capacity	400 L
Temperature	+2°C ~ +10°C
Consumption	1.71 kWh/24h
Rated Power	200 W
Noise level	57 dB(A)
Net Weight	62 Kg
Gross Weight	71 Kg
External Dimensions (WxDxH mm)	600x685x1890
Internal Dimensions (WxDxH mm)	480x540x1680
Packaging dimensions (WxDxH mm)	632x737x2030
Loading quantities 20'/40'/40'HQ	27/54/54

CERTIFICATION

CE RoHS

QRX 400




DETAILS



Digital Thermostat

Lock fitted as standard

PRODUCT DIMENSIONS

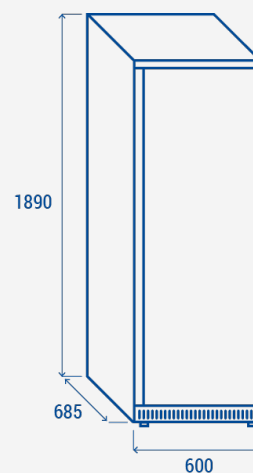

RIGHTWAY ASIA
We make the world a cooler place