

ABS | Upright Cabinets

REFRIGERATED UPRIGHT ▶ GLASS DOOR ▶ INOX



GENERAL FEATURES

- 600 Lt. Refrigerated upright (GLASS DOOR)
- Gray external cabinet, thermoformed internally
- Roll-bond evaporator system with fan assisted cooling
- Automatic compressor cycle defrost
- Foaming Agent Cyclopentane (60mm per side)
- Digital Thermostat
- Removable Gasket
- Double tempered glass with Low-e (Low emissivity glasses) and Argon gas
- Reversible door
- Inner horizontal LED light
- Door with vertical cylindrical handle
- Doors lock fitted as standard
- Adjustable shelves: 4 Pcs + 1 BOTTOM Shelf
- N.2 Adjustable feet + N.2 Rollers at the back
- Energy efficiency class: B

TECHNICAL SPECIFICATIONS

Capacity	600 L
Temperature	M1 (-1°C~+5°C)
Consumption	2.69 kWh/24h
Rated Power	200 W
Noise level	58 dB(A)
Net Weight	104 Kg
Gross Weight	116 Kg
External Dimensions (WxDxH mm)	780x768x1890
Internal Dimensions (WxDxH mm)	660x585x1680
Packaging dimensions (WxDxH mm)	812x757x2030
Loading quantities 20'/40'/40"HQ	21/42/42

CERTIFICATION

CE RoHS


QRXG 600

M1 -1°C +5°C	B ENERGY CLASS	3 +25°C/60RH	36°C
Key icon	Water droplets icon	R600a GAS	60 mm
		LED	

DETAILS

Cabinet suitable for GN2/1 pans	Cabinet suitable for N.2 GN1/1 pans	Digital Thermostat
Lock fitted as standard	Top horizontal LED light	Handle along door profile

PRODUCT DIMENSIONS

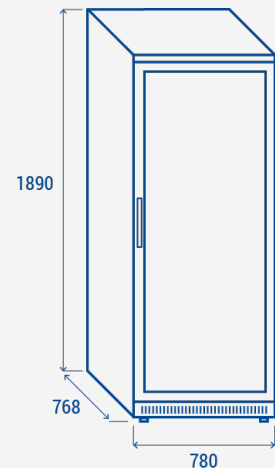

RIGHTWAY ASIA
We make the world a cooler place