

ABS | Upright Cabinets

REFRIGERATED UPRIGHT ▶ WHITE PAINTED



UR 4

	GAS R600a		 70 mm	4 CLIMATIC CLASS	 38 °C

DETAILS

Backlit main switch and digital thermostat fitted as standard	Handle along door profile	Lock fitted as standard
Shelf with small distance between the line and bottom shelf fitted as standard	Inner assistance fan	


GENERAL FEATURES

- 400 Lt. Refrigerated upright
- White external cabinet, thermoformed internally
- Roll-bond evaporator system with fan assisted cooling
- Automatic compressor cycle defrost
- Foaming Agent Cyclopentane (70mm per side)
- Digital Thermostat
- Independent back-lit main switch (White color)
- Removable Gasket and handle along door profile
- Door: Self closing and reversible door fitted as standard
- Doors lock fitted as standard
- Adjustable shelves: 4 Pcs + 1 BOTTOM Shelf
- N.2 Adjustable feet + N.2 Rollers at the back
- Energy efficiency class: C

TECHNICAL SPECIFICATIONS

Capacity	400 L
Temperature	+0°C - +10°C
Consumption	1.359 kWh/24h
Rated Power	155 W
Noise level	54 dB(A)
Net Weight	68 Kg
Gross Weight	82 Kg
External Dimensions (WxDxH mm)	600x625x1863
Internal Dimensions (WxDxH mm)	458x465x1603
Packaging dimensions (WxDxH mm)	640x705x2000
Loading quantities 20'/40'/40'HQ	27/54/54

PRODUCT DIMENSIONS

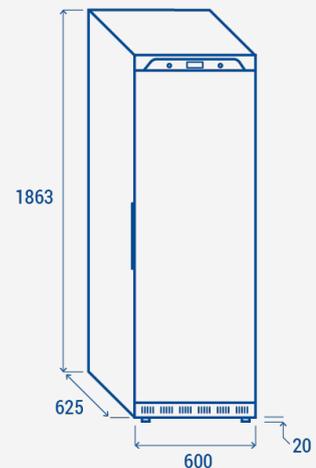

CERTIFICATION

CE RoHS



RIGHTWAY ASIA
We make the world a cooler place