

# ABS | Upright Cabinets

REFRIGERATED UPRIGHT ► INOX



## GENERAL FEATURES

200 Lt. Refrigerated upright	•
S/S external cabinet, thermoformed internally	•
Roll-bond evaporator system with fan assisted cooling	•
Automatic compressor cycle defrost	•
Foaming Agent Cyclopentane (70mm per side)	•
Digital Thermostat	•
Independent back-lit main switch (White color)	•
Removable Gasket and handle along door profile	•
Reversible door (No self closing)	•
Doors lock fitted as standard	•
Adjustable shelves: 2 Pcs + 1 BOTTOM Shelf	•
N.2 Adjustable feet + N.2 Rollers at the back	•
Energy efficiency class: A	•


## TECHNICAL SPECIFICATIONS

Capacity	200 L
Temperature	+0°C ~ +10°C
Consumption	0.934 kWh/24h
Rated Power	120 W
Noise level	52 dB(A)
Net Weight	36 Kg
Gross Weight	40 Kg
External Dimensions (WxDxH mm)	600x625x853
Internal Dimensions (WxDxH mm)	458x465x603
Packaging dimensions (WxDxH mm)	640x660x890
Loading quantities 20'/40'/40'HQ	54/108/162

## CERTIFICATION

CE RoHS


# URX 2

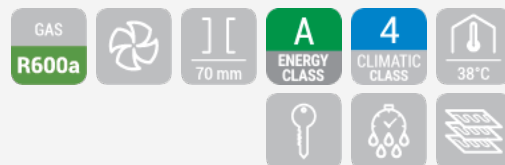

## DETAILS



## PRODUCT DIMENSIONS

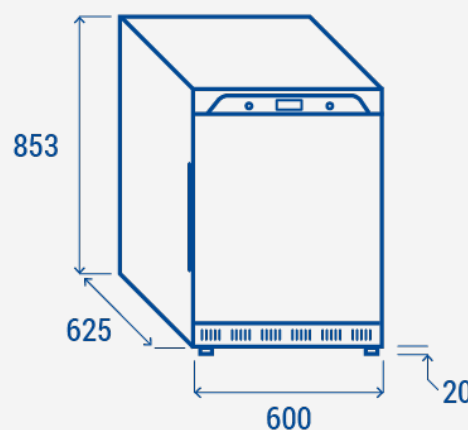

**RIGHTWAY ASIA**  
We make the world a cooler place