

ABS | Upright Cabinets

REFRIGERATED UPRIGHT ► INOX



URX 6



DETAILS



GENERAL FEATURES

- GN2/1 Refrigerated upright (600 Lt.)
- S/S external cabinet, thermoformed internally
- Roll-bond evaporator system with fan assisted cooling
- Automatic compressor cycle defrost
- Foaming Agent Cyclopentane (70mm per side)
- Digital Thermostat
- Independent back-lit main switch (White color)
- Removable Gasket and handle along door profile
- Door: Self closing and reversible door fitted as standard
- Doors lock fitted as standard
- Adjustable shelves GN2/1: 4 Pcs + 1 Pcs Bottom
- N.2 Adjustable feet + N.2 Rollers at the back
- Energy efficiency class: C


TECHNICAL SPECIFICATIONS

Capacity	600 L
Temperature	+0°C - +10°C
Consumption	1.699 kWh/24h
Rated Power	180 W
Noise level	58 dB(A)
Net Weight	84 Kg
Gross Weight	103 Kg
External Dimensions (WxDxH mm)	775x760x1863
Internal Dimensions (WxDxH mm)	633x612x1603
Packaging dimensions (WxDxH mm)	820x760x2000
Loading quantities 20'/40'/40"HQ	21/42/42

CERTIFICATION



PRODUCT DIMENSIONS

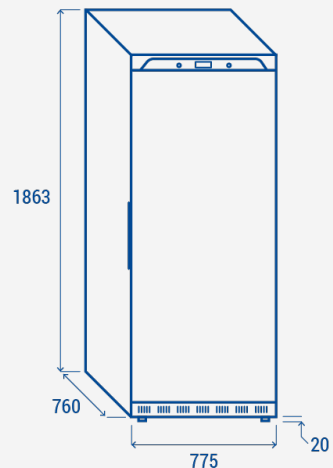

RIGHTWAY ASIA
We make the world a cooler place