

ABS | Upright Cabinets

REFRIGERATED UPRIGHT ► GLASS DOOR ► INOX



URXG 2



DETAILS



GENERAL FEATURES

200 Lt. Refrigerated upright (GLASS DOOR)	•
S/S external cabinet, thermoformed internally	•
Roll-bond evaporator system with fan assisted cooling	•
Automatic compressor cycle defrost	•
Foaming Agent Cyclopentane (70mm per side)	•
Double safety tempered glass with Low-e (Low emissivity glasses)	•
Digital Thermostat	•
Independent back-lit main and lights switches (White color)	•
Double vertical LED light along door profile	•
Removable Gasket and handle along door profile	•
Doors lock fitted as standard	•
Adjustable shelves: 2 Pcs + 1 BOTTOM Shelf	•
N.2 Adjustable feet + N.2 Rollers at the back	•
Energy efficiency class: B	•


TECHNICAL SPECIFICATIONS

Capacity	200 L
Temperature	+2°C ~ +10°C
Consumption	1.36 kWh/24h
Rated Power	140 W
Noise level	52 dB(A)
Net Weight	44 Kg
Gross Weight	48 Kg
External Dimensions (WxDxH mm)	600x625x853
Internal Dimensions (WxDxH mm)	458x465x603
Packaging dimensions (WxDxH mm)	640x660x890
Loading quantities 20'/40'/40'HQ	54/108/162

CERTIFICATION

CE RoHS

PRODUCT DIMENSIONS

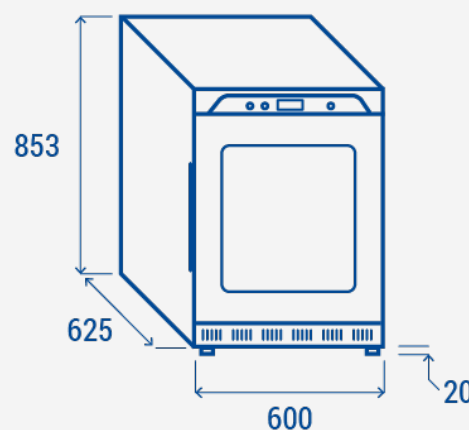

RIGHTWAY ASIA
We make the world a cooler place