

ABS | Upright Cabinets

REFRIGERATED UPRIGHT ► CLASS A ► INOX



GENERAL FEATURES

- GN2/1 Refrigerated upright (CLIMATE 4 / CLASS A)
- S/S external cabinet, thermoformed internally
- Roll-bond evaporator system with fan assisted cooling
- Rear inner evaporator conveyor
- Inverter compressor
- Automatic compressor cycle defrost
- Foaming Agent Cyclopentane (70mm per side)
- Digital Thermostat
- Opening door alarm/High temperature alarm
- Removable Gasket
- Door: Self closing and reversible door fitted as standard
- Lock and main switch fitted as standard
- Adjustable shelves GN2/1: 4 Pcs + 1 Pcs Bottom
- N.2 Adjustable feet + N.2 Rollers at the back
- Energy efficiency class: A

TECHNICAL SPECIFICATIONS

Capacity	600 L
Temperature	+0°C - +8°C
Consumption	0.898 kWh/24h
Rated Power	112.3 W
Noise level	58 dB(A)
Net Weight	99 Kg
Gross Weight	113 Kg
External Dimensions (WxDxH mm)	775x756x1900
Internal Dimensions (WxDxH mm)	596x572x1628
Packaging dimensions (WxDxH mm)	835x792x2070
Loading quantities 20'/40'/40'HQ	20/42/42

CERTIFICATION

CE RoHS


CRX 6 - 4A



DETAILS



PRODUCT DIMENSIONS

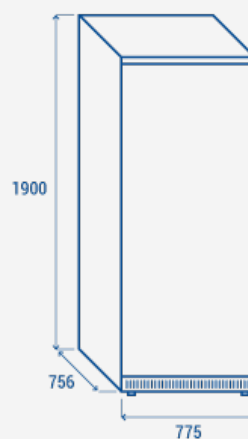

RIGHTWAY ASIA
We make the world a cooler place