

# ABS | Upright Cabinets

REFRIGERATED UPRIGHT ▶ WHITE PAINTED



# UR 6

	GAS <b>R600a</b>		 70 mm	<b>4</b> CLIMATIC CLASS	 38 °C

## DETAILS

Backlit main switch and digital thermostat fitted as standard	Handle along door profile	Lock fitted as standard
Cabinet suitable for GN2/1 pans	Shelf with small distance between the line and bottom shelf fitted as standard	Inner assistance fan


## GENERAL FEATURES

- GN2/1 Refrigerated upright (600 Lt.)
- White external cabinet, thermoformed internally
- Roll-bond evaporator system with fan assisted cooling
- Automatic compressor cycle defrost
- Foaming Agent Cyclopentane (70mm per side)
- Digital Thermostat
- Independent back-lit main switch (White color)
- Removable Gasket and handle along door profile
- Door: Self closing and reversible door fitted as standard
- Doors lock fitted as standard
- Adjustable shelves GN2/1: 4 Pcs + 1 Pcs Bottom
- N.2 Adjustable feet + N.2 Rollers at the back
- Energy efficiency class: C

## TECHNICAL SPECIFICATIONS

Capacity	<b>600 L</b>
Temperature	<b>+0°C - +10°C</b>
Consumption	<b>1.699 kWh/24h</b>
Rated Power	<b>180 W</b>
Noise level	<b>58 dB(A)</b>
Net Weight	<b>87 Kg</b>
Gross Weight	<b>106 Kg</b>
External Dimensions (WxDxH mm)	<b>775x760x1863</b>
Internal Dimensions (WxDxH mm)	<b>633x612x1603</b>
Packaging dimensions (WxDxH mm)	<b>820x760x2000</b>
Loading quantities 20'/40'/40"HQ	<b>21/42/42</b>

## PRODUCT DIMENSIONS

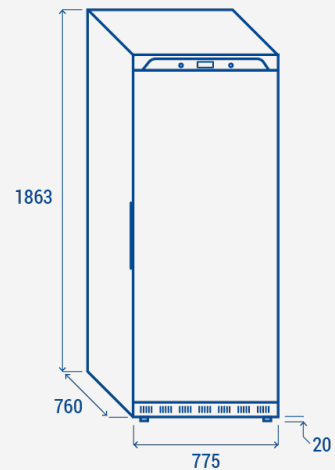

## CERTIFICATION

CE RoHS



**RIGHTWAY ASIA**  
We make the world a cooler place